




19405 63rd AVE NE, Arlington, WA 98223
 Phone: 360-435-6151 Fax: 360-435-6036
diamondprecaststairs.com

Order Form

Date Needed By		Company Name	
Billing Address		Contact	
Phone		Email	

Steps required to determine tread size:

1. Determine inside stringer to stringer dimension minus ¼" for installation.
2. Determine location of anchors – outside edge to anchor center – Standard is 1 ¼"
3. Measure from back to center of back insert
4. Measure center to center for insert location – Standard is 4"
5. Measure thickness of tread – Standard is 2 ½"

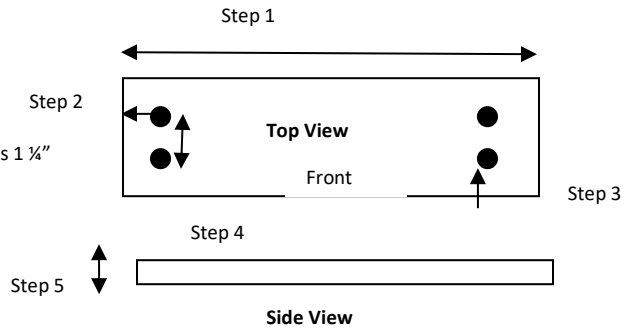

Shipping Address		Delivery Contact Name & Number	
Quantity		Style of Tread	Flat Half Closed
Finish of Tread		Forklift on Site?	Yes or No
Credit Card #		Credit Card Exp Date	

Comments:
